

RENOLIT HLT 2

Synthetic Longlife Grease

Description

RENOLIT HLT 2 is an adhesive, lithium soap based lubricating grease designed for long-term applications, containing synthetic (poly-alphaolefin) base oil.

RENOLIT HLT 2 is resistant to high mechanical and thermal loads, work stable, water resistant, and protects against corrosion even in salty environments. Its working temperature range is between -40°C and + 140°C.

Application

RENOLIT HLT 2 is recommended for all greasing points in roller and friction bearings, especially those exposed to fluctuating ambient temperatures, and when high performance is required.

Shelf Life


The minimum shelf life is 36 months if the product is properly stored between 0°C and 40°C in its unopened original container in a dry place. The indication of a minimum shelf life does not include any guarantee of durability.

Advantages

- Suitable for life-time lubrication
- Water resistant
- Work stable
- Protects from corrosion, even in the presence of salt water
- Suitable for high thermal loads
- Good adhesiveness
- Suitable for low temperatures
- Mechanically high loadable

Specifications/Approvals

- SNCF
- Evonik
- Lincoln
- Bundeswehr (GY 3010)

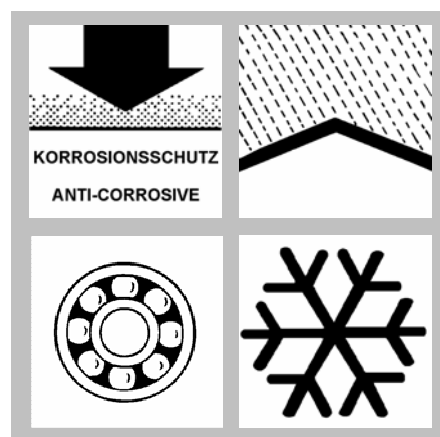

RENOLIT HLT 2

Synthetic Longlife Grease

Characteristics

Properties	Unit	Data	Test method
Classification	-	KPHC 2 N-40 ISO L-X-DDHB 2	DIN 51 502 ISO 6743-9
Colour	-	Light brown	-
Thickener	-	Lithium soap	-
Dropping point	°C	≥ 180	IP 396
Worked penetration (Pw 60)	0,1 mm	265 – 295	DIN ISO 2137
Work resistance $\Delta \square P_w$ (100000 - 60)	0,1 mm	≤ 40	DIN ISO 2137
NLGI-grade	-	2	DIN 51 818
Corrosion protection properties Emcor Test	Degree of corr.	0 - 0	DIN 51 802
Copper corrosion	Degree of corr.	1 -100	DIN 51 811
Flow pressure at -40°C	hPa	≤ 1400	DIN 51 805
Oil separation at 40°C / 18h at 40°C / 7d	%	≤ 1,5 ≤ 3,5	DIN 51 817
Oxidation resistance 100 h / 100°C	bar	≤ 0,5	DIN 51 808
Base oil viscosity at 40°C at 100°C	mm ² /s	105 12	DIN 51 562-1
Temperature range	°C	-40 up to +140	DIN 51 825



RENOLIT HLT 2

Synthetic Longlife Grease

The information contained in this product information is based on the experience and know-how of FUCHS EUROPE SCHMIERSTOFFE GMBH in the development and manufacturing of lubricants and represents the current state-of-the-art. The performance of our products can be influenced by a series of factors, especially the specific use, the method of application, the operational environment, component pre-treatment, possible external contamination, etc. For this reason, universally-valid statements about the function of our products are not possible. The information given in this product information represents general, non-binding guidelines. No warranty expressed or implied is given concerning the properties of the product or its suitability for any given application.

We therefore recommend that you consult a FUCHS EUROPE SCHMIERSTOFFE GMBH application engineer to discuss application conditions and the performance criteria of the products before the product is used. It is the responsibility of the user to test the functional suitability of the product and to use it with the corresponding care.

Our products undergo continuous improvement. We therefore retain the right to change our product program, the products, and their manufacturing processes as well as all details of our product information sheets at any time and without warning, unless otherwise provided in customer-specific agreements. With the publication of this product information, all previous editions cease to be valid.

Any form of reproduction requires express prior written permission from FUCHS EUROPE SCHMIERSTOFFE GMBH.

© FUCHS EUROPE SCHMIERSTOFFE GMBH. All rights reserved.