

RENOLIT LZR 000

Description

RENOLIT LZR 000 is a high quality semi-fluid grease with defined rust protection, based on lithium-calcium soap, carefully selected base oils and additives.

RENOLIT LZR 000 has good thermal stability, good pressure capacity, it is water resistant, minimizes wear and has good adhesion to metallic surfaces.

Application

RENOLIT LZR 000 is primarily used in centralized lubricating systems of trucks and commercial vehicles.

Furthermore, RENOLIT LZR 000 is usable in low loaded industrial gears.

Shelf Life


The minimum shelf life is 36 months if the product is properly stored between 0°C and 40°C in its unopened original container in a dry place. The indication of a minimum shelf life does not include any guarantee of durability.

Advantages

- Water resistant
- Pressure-loadable
- Adhesive
- Temperature stable
- Wear reducing
- Defined corrosion protection
- Suitable for low temperatures
- Good pumpability in central lubricating systems

Specifications / Approvals

- Daimler MB 6833.00, sheet 264.0
- MAN 283 LI-P 00/000
- Willy Vogel AG
Fluid greases for commercial vehicles
- Lincoln
- Tecalemit

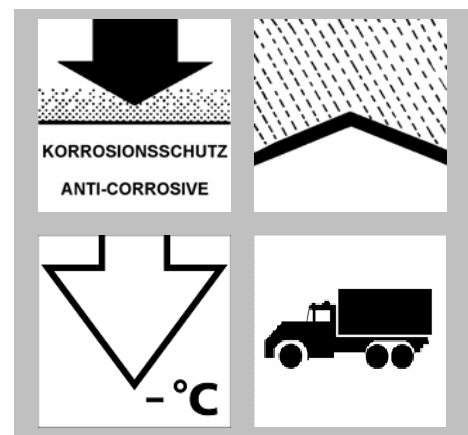

RENOLIT LZR 000

Characteristics

| Properties | Unit | Data | Test method |
|---|--------------------|---------------------------------------|--------------------------|
| Classification | - | GP 00/000 G-40 ISO-L-X-DBIB 00/000 | DIN 51 502 ISO 6743-9 |
| Colour | - | Green | - |
| Thickener | - | Lithium-calcium- soap | - |
| Dropping point | ° C | ≥ 160 | IP 396 |
| Worked penetration (Pw 60) | 0.1 mm | 430 - 460 | DIN ISO 2137 |
| NLGI-grade | - | 00 / 000 | DIN 51 818 |
| Flow pressure at -35 °C | hPa | ≤ 60 | DIN 51 805 |
| Oxidation stability, pressure drop, 100 hrs / 100 °C | hPa | ≤ 500 | DIN 51 808 |
| Base oil viscosity at 40 °C at 100 °C | mm ² /s | 43 6 | DIN 51 562-1 |
| Temperature range | °C | -40 up to +110 | DIN 51 826 |



RENOLIT LZR 000

The information contained in this product information is based on the experience and know-how of FUCHS EUROPE SCHMIERSTOFFE GMBH in the development and manufacturing of lubricants and represents the current state-of-the-art. The performance of our products can be influenced by a series of factors, especially the specific use, the method of application, the operational environment, component pre-treatment, possible external contamination, etc. For this reason, universally-valid statements about the function of our products are not possible. The information given in this product information represents general, non-binding guidelines. No warranty expressed or implied is given concerning the properties of the product or its suitability for any given application.

We therefore recommend that you consult a FUCHS EUROPE SCHMIERSTOFFE GMBH application engineer to discuss application conditions and the performance criteria of the products before the product is used. It is the responsibility of the user to test the functional suitability of the product and to use it with the corresponding care.

Our products undergo continuous improvement. We therefore retain the right to change our product program, the products, and their manufacturing processes as well as all details of our product information sheets at any time and without warning, unless otherwise provided in customer-specific agreements. With the publication of this product information, all previous editions cease to be valid.

Any form of reproduction requires express prior written permission from FUCHS EUROPE SCHMIERSTOFFE GMBH.

© FUCHS EUROPE SCHMIERSTOFFE GMBH. All rights reserved.