



PEERLESS* LLG & OG CALCIUM SULPHONATE GREASES

Introduction

Petro-Canada PEERLESS* greases are premium performance, multi-application greases formulated to reduce operating costs and provide extended protection in extreme high temperature or wet operating conditions.

PEERLESS LLG combines three areas of high technology, namely:

- Petro-Canada ultra pure HT Severely Hydrocracked base oils
- Petro-Canada's patented and proven antioxidant chemistry
- The latest in calcium sulphonate complex grease thickeners

The PEERLESS OG line of extreme pressure (EP), high temperature multi-application greases are specially formulated to be highly effective in wet and marine environments. Based on a special calcium sulfonate complex thickener, these greases can absorb moderate amounts of water without softening, changing consistency or losing corrosion prevention capability.




PEERLESS LLG and OG2 meet NLGI Automotive Service Classification GC-LB for wheel bearing and chassis lubrication.

Features and Benefits for PEERLESS LLG

- **Long life under high temperature provides long-lasting equipment protection**
 - PEERLESS LLG lasts longer than competitive premium multi-application grease at high temperature.
 - PEERLESS LLG with its highest operating temperature provides extended protection under severe conditions compared to leading competitive products

PC PEERLESS LLG's long life under high temperature provides long-lasting equipment protection


ASTM D3527 Bearing Life Performance Test at 160°C (320°F), 1000rpm speed and 111 N thrust load

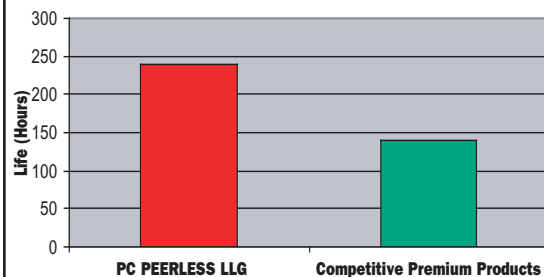

* This test differentiates among wheel bearing greases having distinctly different high temperature characteristics. The longer the life, the better the protection.

PC PEERLESS LLG with the highest operating temperature provides extended service life for customers

ASTM D2265 Dropping Point Test is a qualitative indication of the heat resistance of grease for applications which require a semi-solid lubricant

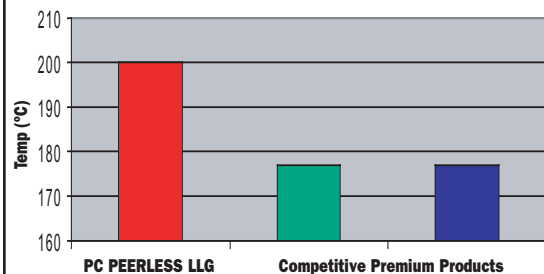


- **Excellent water resistance**
 - PEERLESS LLG superior water washout resistance reduces maintenance costs in wet environments
 - Stays in place in wet and marine applications
 - Maintains consistency after absorbing water
 - Strongly resists water wash-off and lengthens lubrication intervals

What is the HT difference?

Petro-Canada starts with the patented HT purity process to produce water-white, 99.9% pure base oils. The result is a range of lubricants, specialty fluids and greases that deliver maximum performance for our customers.




- **High mechanical stability in severe operating conditions.**
 - PEERLESS LLG also lowers maintenance costs as a result of reduced product breakdowns under low to moderately high shear conditions
 - Reduces bearing wear and extends equipment life
 - Protects bearings under heavy loading

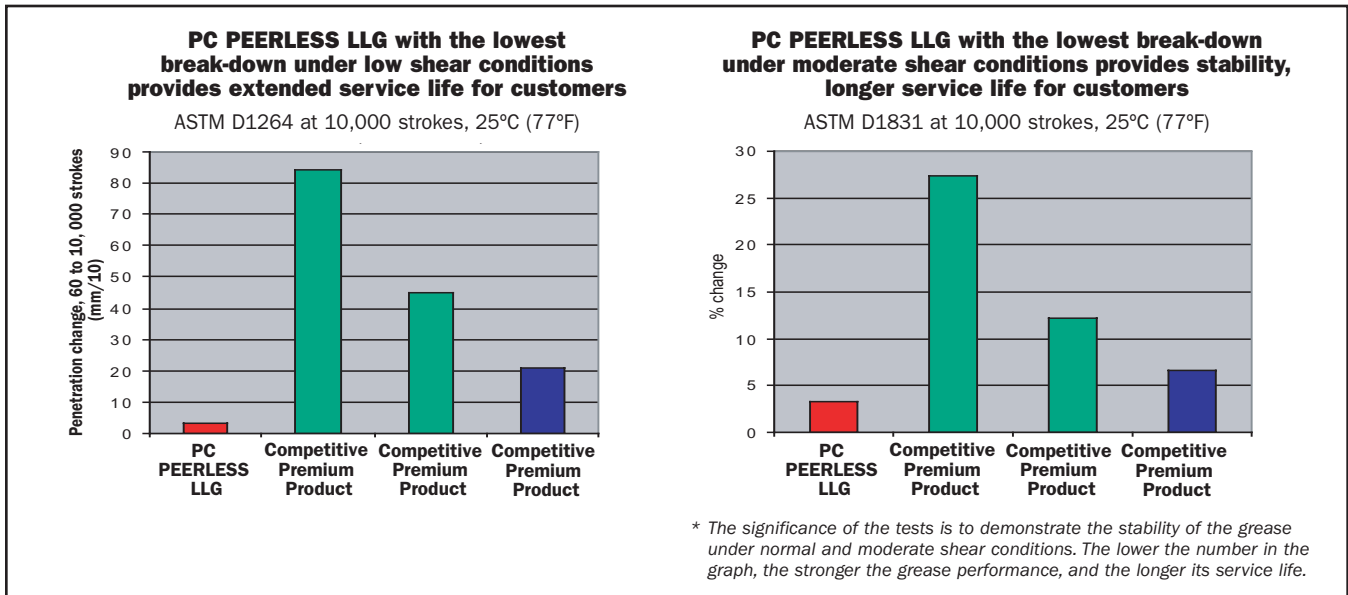

Features and Benefits of PEERLESS OG

- **Excellent performance in the presence of water**
 - Stays in place in wet and marine applications
 - Maintains consistency after absorbing water
 - Excellent resistance to washout
- **Wide temperature / pressure range**
 - Special thickener enhances high temperature and pressure capabilities
 - Low temperature hand-gun dispensing capability
 - Performs extremely well in low ambient temperature applications
- **Great rust and corrosion protection**
 - Protects components in the presence of water
 - Reduces maintenance costs
- **Superior adhesive properties**
 - Protects rotating parts to reduce equipment costs
 - Excellent resistance to washout for better protection
- **State of the art formulations**
 - Excellent protection against rust and corrosion especially in marine applications
 - Excellent adhesive properties to protect rotating parts and reduce equipment cost
 - Special thickener enhances high temperature and capabilities
 - Built-in, non-sacrificial anti-oxidant chemistry for long life

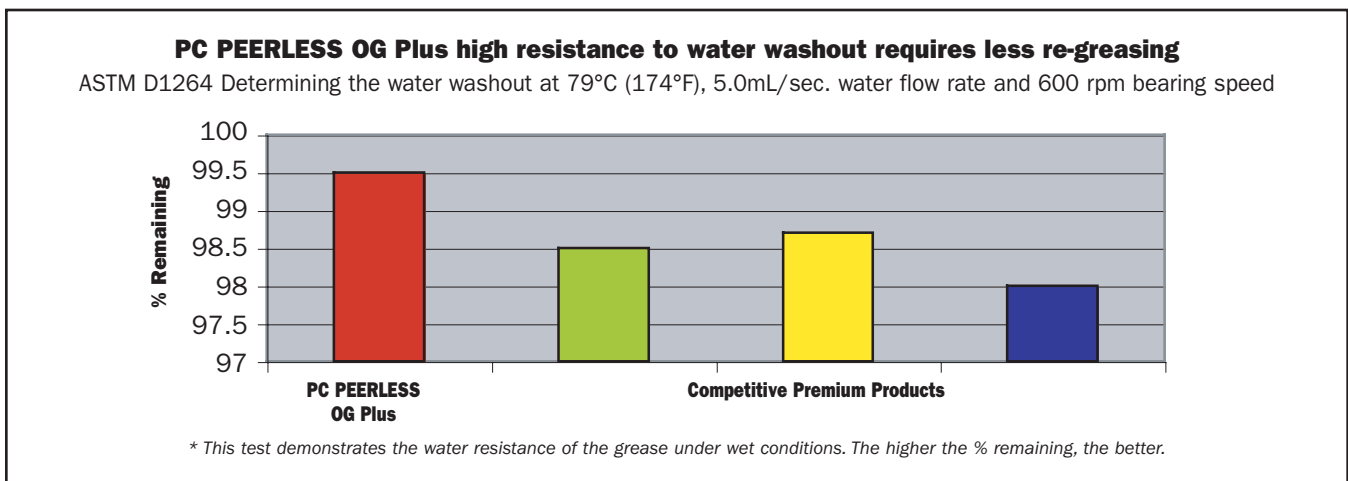

Applications

Petro-Canada PEERLESS LLG and OG Greases are formulated to provide excellent lubrication in a wide range of applications especially under high temperature and extremely wet operating conditions. PEERLESS greases are recommended for a full range of industrial applications, and automotive including:

- General Manufacturing
- Pulp & Paper
- Fleet
- Forestry
- Power Generating
- Food Machinery not in direct contact with food

PEERLESS LLG

A premium multi-application calcium sulphonate complex grease, PEERLESS LLG provides outstanding oxidation stability, excellent water resistance, outstanding rust protection and excellent load carrying ability under high operating temperatures. It is particularly recommended for high temperature and long life applications which include:

- Equipment running continuously at temperatures up to 200°C/392°F and extremely wet conditions
- Wheel bearings and automotive chassis
- Sealed-for-life bearings
- Constant velocity joints
- Small appliance
- Ovens and Kilns

PEERLESS OGO

A premium multi-application calcium sulphonate complex grease, PEERLESS OGO has excellent performance in the presence of water, wide operating temperature range, great rust and corrosion protection and superior adhesive properties. Applications include:

- Central lubricating systems
- Applications with low ambient temperatures
- Applications with the requirement for a softer grade product

PEERLESS OG1

A premium multi-application calcium sulphonate complex grease, PEERLESS OG1 has excellent performance in the presence of water, wide operating temperature range, great rust and corrosion protection and superior adhesive properties. Applications include:

- Wheel bearings
- Automotive chassis
- Central lubricating systems

PEERLESS OG2 and OG2 Red A premium multi-application calcium sulphonate complex grease, PEERLESS OG2 and OG2 Red have excellent performance in the presence of water, wide operating temperature range, great rust and corrosion protection and superior adhesive properties. Applications include:

- Wheel bearings
- Automotive chassis
- Forklift mast slides
- Power shovel bucket pins
- Mining scoop trams
- Rock crushers
- Pulp press roller bearings
- Farming Equipment

PEERLESS OG2 PLUS

A premium multi-application calcium sulphonate complex grease, PEERLESS OG2 Plus has excellent performance in the presence of water, wide operating temperature range, great rust and corrosion protection and superior adhesive properties. Applications include:

- Wet end bearings of paper mills
- Pulp press roller bearings
- Applications where superior adhesion is a key requirement

PEERLESS SVG 102

A premium multi-application calcium sulphonate complex grease, PEERLESS SVG 102 has excellent performance in protecting valves against corrosion and deleterious effects of hydrogen sulphide present in the gas streams in the oil and gas industry. Applications include:

- Internal parts of valves used in production and distribution of sour gas
- Valves used in LPG and water injection systems in oil and gas industry

PEERLESS XCG-FLEX

A premium multi-application calcium sulphonate complex coupling grease, PEERLESS XCG-Flex is a grease with outstanding mechanical stability and resistance to oil separation. It has a high-load carrying ability, high dropping point and excellent resistance to corrosion and water washout. It prevents oxidative fretting corrosion and protects against wear under potentially high gear tooth loadings and vibration. PEERLESS XCG-Flex meets AGMA coupling grease specifications CG-1 and CG-2. Applications include:

- High-speed flexible couplings where severe centrifugal forces are generated
- Industrial couplings of the gear and flexible steel type

Operational Considerations

PEERLESS line of products provides long wear protection under normal operating conditions. However, actual grease life is dependent upon system design and operating practices. No Nonsense Lubricants Warranty applies.

Typical Performance Data

PROPERTY	TEST METHOD	PEERLESS							
		LLG	OG0	OG1	OG2	OG2 RED	OG PLUS	SVG 102	XCG-FLEX
NLGI Grade	D217	2	0	1	2	2	2.5	1	1
NLGI Standard		GC-LB	-	GC-LB	GC-LB	GC-LB	-	-	-
Colour	PCM 264	Burgundy	Cream	Cream	Cream	Red	Green Cream	Grey	Tan
Texture	PCM 264	Smooth/Buttery	Smooth	Smooth	Smooth	Smooth	Smooth	Buttery	Smooth
Dropping Point, °C/°F	D2265	314/597	284/543	310/590	304/579	300/572	304/579	262/503	290/554
Worked Penetration, 60 strokes	D217	284	366	329	276	270	245	324	335
Oxidation Stability 100 hrs, psi drop	D942	2.2	2	2	2	2	2	3	-
Base Oil Viscosity, cSt @ 40°C/SUV @ 100°F	D445	95/495	40/187	53/270	73/378	73/378	73/378	101/527	329/1764
cSt @ 100°C/SUV @ 210°F	D445	10.8/63	7.3/50	8.9/56	9.4/58	9.4/58	9.4/58	11.2/64	22.5/112
Timken OK Load, Kg/lb	D2509	27/60	22.7/50	27/60	27/60	27/60	27/60	27/60	29.5/65
Four Ball Weld Point, kg	D2596	500	315	400	400	500	500	620	500
Four Ball Wear scar diam mm	D2266	0.45	0.42	0.38	0.52	0.42	0.54	0.51	0.41
Copper Corrosion	D4048	1a	1b	1b	1b	1b	1b	1a	1b
Water Washout % @ 79°C /174°F	D1264	1.5	-	2.8	2.2	2.8	0.5	1.5	1.5
Temperature Range, °C		-20 to 200	-35 to 163	-30 to 163	-25 to 163	-25 to 163	-20 to 163	-35 to 163	-20 to 163
Temperature Range, °F		-4 to 392	-31 to 325	-22 to 325	-13 to 325	-13 to 325	-4 to 325	-31 to 325	-4 to 325

The values quoted above are typical of normal production. They do not constitute a specification.

Health and Safety

To obtain Material Health and Safety Data Sheets (MSDS), contact one of Petro-Canada's TechData Info Lines.

TechData Info Lines

If you would like to know more about **Petro-Canada PEERLESS**, or any other product in our complete line of quality lubricants, please contact us at:

Lubricants Head Office
Petro-Canada
2310 Lakeshore Road West
Mississauga, Ontario
L5J 1K2



Canada - West Phone 1-800-661-1199
 - East (English)..... Phone 1-800-268-5850
 (French)..... Phone 1-800-576-1686

Other Areas Phone (416) 730-2408
 E-mail lubecsr@petro-canada.ca
 Internet www.petro-canada.com

Petro-Canada Europe Lubricants
The Manor, Haseley Business Centre
Warwick, Warwickshire
CV35 7LS
United Kingdom

Phone +44 (0) 2476-247294
 Fax +44 (0) 2476-247295
 Internet..... www.petrocanada.nl

Petro-Canada America Lubricants
980 North Michigan Avenue
Suite 1400, #1431
Chicago, Illinois
USA 60611

Phone 1-888-284-4572
 Fax..... (708) 246-8994
 E-mail email@petro-canadaamerica.com